

Cat. A

categoria A

COMBINATION OF COLOURS

114

FABRIC TYPE

7

FABRICS OMOLAGATED 11M 04

callao



col. 101



col. 56



col. 44




col. 06

callao



col. 413



col. 08



col. 405




col. 419

chill



col. 1



col. 4

coral



col. 903



col. 906



col. 101



col. 102

jewel



col. 1



col. 4

managua



col. 400



col. 402



col. 404



col. 405

mikado



col. 013



col. 002



col. 003



col. 004

twist




col. 2



col. 3



col. 5



col. 32



col. 12




col. 505




col. 17




col. 19




col. 415




col. 10




col. 901



col. 21



col. 2



col. 3



col. 400



col. 301



col. 700




col. 103




col. 2




col. 3




col. 500



col. 501



col. 300



col. 002



col. 006



col. 007



col. 005



col. 008




col. 7



col. 9




col. 12




col. 13




col. 609



col. 51




col. 703




col. 36




col. 807



col. 801




col. 701



col. 35



col. 5



col. 8



col. 7



col. 506



col. 504



col. 602



col. 600




col. 5




col. 7




col. 8




col. 502



col. 800



col. 701




col. 700




col. 001



col. 011




col. 010



col. 009




col. 18




col. 19



col. 28



col. 29




col. 37




col. 606




col. 600




col. 601




col. 702




col. 604




col. 31



col. 42



col. 6



col. 9



col. 801




col. 803



col. 804



col. 800



col. 6




col. 9




col. 401




col. 302



col. 201



col. 200




col. 017




col. 014



col. 015



col. 016



col. 31



col. 15



col. 20



col. 27




col.405

callao

OMOLOGATO 11M

Type/ Tipologia	Eco-leather Eco-pelle
Composition/ Composizione	88% pvc, 6% PL, 6% cotton- cotone
Weight/ Peso	+/- 650 gr/m2
Pilling Resistance/ Resistenza al pilling	-
Light fastness/ Solidità alla luce	ISO 105 B02: 7
Abrasion resistance/ Resistenza all'abrasione	ISO 5470-2: >100.000 rubs
Fire Retardant/ Ignifugo	11M - UNI 9175, EN 1021 part 1/2, BS 5852 part 1, NF D60 013 (AM 18), NFPA 260 Class 1, California TB117:2013, IMO med ftp 307 part 8, ÖNOM B 3825.

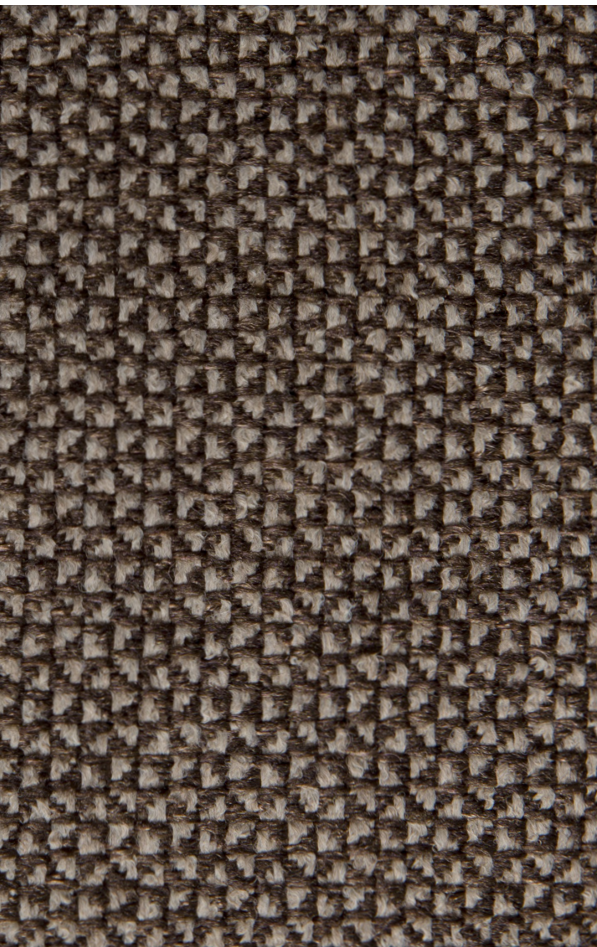

col. 4

chill

Type/ Tipologia	Fabric Tessuto
Composition/ Composizione	100%PES
Weight/ Peso	+/- 330 gr/m2
Pilling Resistance/ Resistenza al pilling	-
Light fastness/ Solidità alla luce	-
Abrasion resistance/ Resistenza all'abrasione	EN ISO 12947-2: 40.000 rubs
Fire Retardant/ Ignifugo	11M - UNI 9175, EN 1021 part 1/2.



col.101

coral

OMOLOGATO 11M


Type/ Tipologia	Fabric Tessuto
Composition/ Composizione	100% PL - FR backing
Weight/ Peso	+/- 660 gr/ml
Pilling Resistance/ Resistenza al pilling	EN ISO 12945-2: ≥4
Light fastness/ Solidità alla luce	EN ISO 105 - B02: ≥5
Abrasion resistance/ Resistenza all'abrasione	EN ISO 12947-2: ≥60.000 rubs
Fire Retardant/ Ignifugo	11M - UNI 9175, EN 1021 part 1/2, BS 5852-1:1979 0/1, NFPA 260, CAL TB117:2013, IMO 2010 FTP code Annex 1-part 8:2010-Source 0.



col. 4

jewel

Type/ Tipologia	Fabric Tessuto
Composition/ Composizione	100%PES
Weight/ Peso	+/- 300 gr/m2
Pilling Resistance/ Resistenza al pilling	EN ISO 12945-2: 4/5
Light fastness/ Solidità alla luce	EN ISO 105 - B02: 5/6
Abrasion resistance/ Resistenza all'abrasione	EN ISO 12947-2: 100.000 rubs
Fire Retardant/ Ignifugo	11M - UNI 9175, EN 1021 part 1/2.

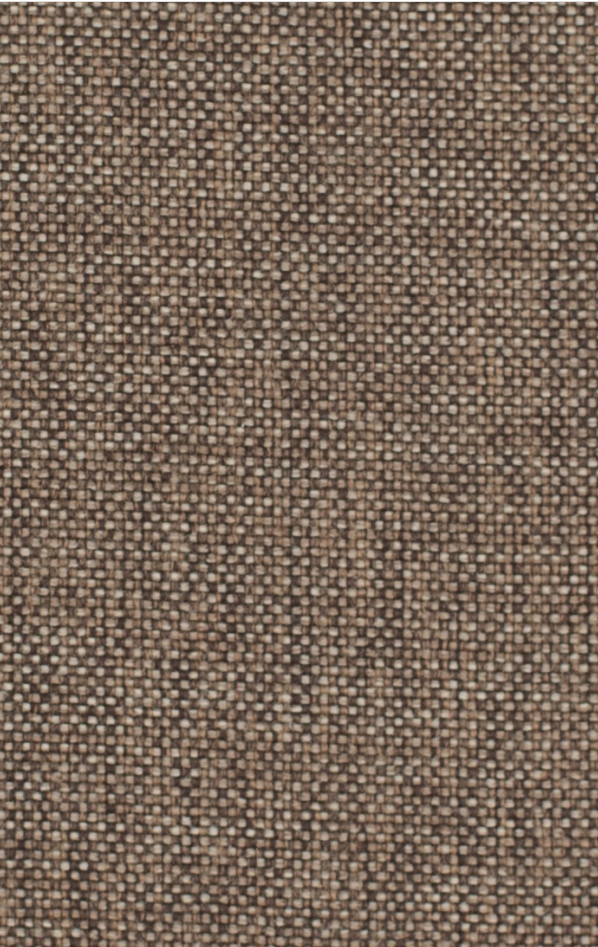


col.404

managua

OMOLOGATO 11M

Type/ Tipologia	Fabric Tessuto
Composition/ Composizione	100% Polypropylene
Weight/ Peso	+/- 228 gr/m2
Pilling Resistance/ Resistenza al pilling	ISO 12945-2: 5
Light fastness/ Solidità alla luce	ISO 105 B02: 5/6
Abrasion resistance/ Resistenza all'abrasione	ISO 12947-2: > 100.000 rubs
Fire Retardant/ Ignifugo	11M - UNI 9175, EN 1021 part 1/2, BS 5852 crib 5, NFPA 260 Class 1, California TB117:2013, IMO med ftp 307 part 8.

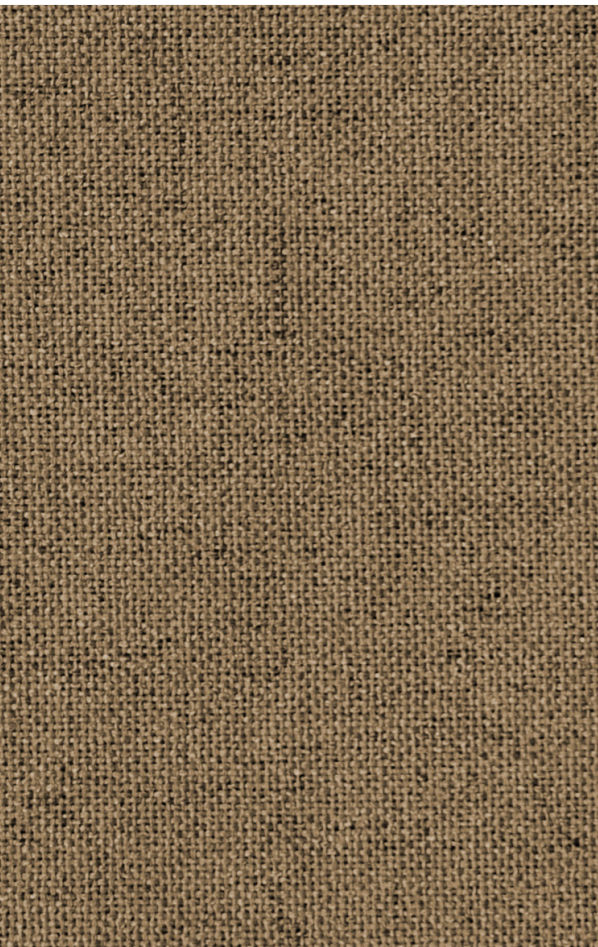

col. 003

mikado

OMOLOGATO 11M

Type/ Tipologia	Fabric Tessuto
Composition/ Composizione	100% PL FR backing
Weight/ Peso	+/- 640 gr/ml
Pilling Resistance/ Resistenza al pilling	EN ISO 12945-2: ≥4
Light fastness/ Solidità alla luce	EN ISO 105 - B02: ≥3/4
Abrasion resistance/ Resistenza all'abrasione	EN ISO 12947-2: ≥100.000 rubs
Fire Retardant/ Ignifugo	11M - UNI 9175, EN 1021 part 1/2, BS 5852-1:1979 0/1, NFPA 260, CAL TB 117:2013, IMO 2010 FTP code Annex 1-part 8:2010-Source 0.



col.5

twist

Type/ Tipologia	Fabric Tessuto
Composition/ Composizione	55% POL - 35%PU 10% CO.
Weight/ Peso	+/- 710 gr/m2
Pilling Resistance/ Resistenza al pilling	UNI EN ISO 12945-2:2002 5000 cycles: ≥ 4/5
Light fastness/ Solidità alla luce	EN ISO 105 - B02: ≥4/5
Abrasion resistance/ Resistenza all'abrasione	-
Fire Retardant/ Ignifugo	11M - UNI 9175, EN 1021 part 1/2, IDROREPELLENTE.



tel. +39 049 9200500
commerciale@innovaimbottiti.com
www.innovaimbottiti.com

INNOVA Srl
Via Meucci, 17 - 35011
Campodarsego (PD) - Italy